


# Product Regulations Supplement One

**For the Assessment Certification Scheme  
& BS10125 Vehicle body repair specification Certification Seal**

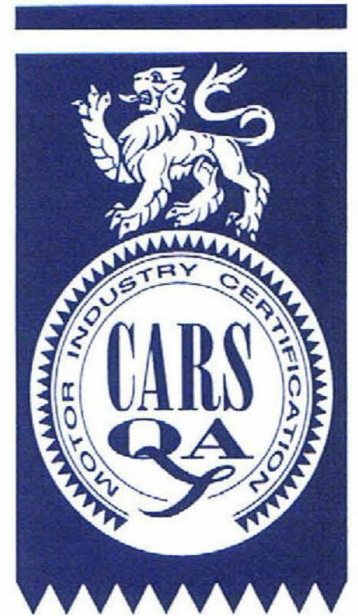

---

## Use of the Product Certificate and Accredited Product Seal

### Introduction

This supplement to the CARS QA Regulations defines the rules and restrictions regarding the use of the Product Certificate and Accredited Certification Seal.

### The Certification Seal

All CARS QA certificated clients are allowed to use the Certification Seal in accordance with the following rules.

The Certification Seal may be used on **stationery, advertising and publicity** in conjunction with:

- i) your company name
- ii) your certificate number,
- iii) statements to indicate any of your business activities, or addresses not within your scope of certification.
- iv) **Product packaging is considered as that which can be removed without the product disintegrating or being damaged. Accompanying information is considered as separately available or easily detachable. Type labels or identification plates are considered as part of the product. The statement shall in no way imply that the product, process or service is certified by this means. The statement shall include reference to: identification (e.g. brand or name) of the certified client; the type of management system (e.g. product) and the applicable standard; the certification body issuing the certificate.**

Items i) to iii) above must be clearly legible and placed in a prominent position underneath or adjacent to the Certification Seal. The accredited seal can not be used on signs, flags, vehicles or parts thereof, e.g. number plates.

The Certification Seal is not to be used in a misleading way or any products, packaging, flags, or externally on vehicles and buildings.

You shall discontinue any use of the Certification Seal which we deem to be misleading or unacceptable and cease using it altogether when you no longer hold a valid Certificate of Distinction. We may require you to take specific actions in the case of misuse (see item 14 of the Regulations).

The Certification Seal may be displayed as shown in diagram 1 in plain black or in a single colour. The single colour must be pantone 2747 or the predominant colour of your letterhead. The minimum size for the reproduction of the Certification Seal shall be 20mm in diameter.

Where you have any doubt as to the use of the Certification Seal, or you wish to use the Seal in any other manner not described in this Supplement, please contact us to discuss and obtain our approval prior to use.

The Accredited Certification Seal

You may use the Accredited Certification Seal, as shown in diagram 1 / 1b.

Diagram 1 shows the normal Accredited Certification Seal, whereas diagram 1b shows the Accredited Certification Seal using the reversed Accreditation Mark. Holders of accredited CARS QA certification are entitled to use either mark in accordance with the rules set out in this document.

Where you have any doubts as to the use of the Accredited Certification Seal, or you wish to use the Seal in any other manner not described in this Supplement, please contact us to discuss and obtain our approval prior to use.

Diagram 1/ 1B The Accredited Certification Seal

1

1B – REVERSED LOGOS

